



High Purity 99.99% Red Copper Wire 4mm 6mm 8mm Solid Bare Copper Wire Use For Electric

Our Product Introduction

Basic Information

- Place of Origin: china
- Brand Name: Jinshunlai
- Certification: IOS AISI, ASTM, GB, EN
- Model Number: 0.1mm-900mm
- Minimum Order Quantity: 1kg
- Price: 5000usd
- Delivery Time: 5day
- Payment Terms: L/C, T/T , Western Union,D/P
- Supply Ability: 90000ton



Product Specification

- Packaging Details: Waterproof Paper, Steel Strip Packed And Other Standard Export Seaworthy Package, Or Customized Package
- Temperature Rating: Varies
- Price: Contact Us
- Material: Copper
- Length: Varies
- Color: Red Yellow
- Place Of Origin: China
- Delivery Time: Within 7-10 Working Days
- Conductor: Single



More Images



for more products please visit us on copper-solid.com


Product Description

High Purity 99.99% Red Copper Wire 4mm 6mm 8mm Solid Bare Copper Wire Use For Electric

Solid Bare Copper Wire

Place of Origin	China
Type	Brass Wire
Application	wire cutting edm, Electric Wire
Grade	CuZn35, CuZn37
Brand Name	SUSHANG
Model Number	CuZn35, CuZn37
Processing Service	Bending, Decoiling, Welding, Punching, Cutting
Product name	High Purity Copper Wire 99.99%
Key word	Copper Wire Scrap 99.99
Purity	99.95%-99.99%Copper Wire Scrap
Material	99.95% Pure Copper
Top Quality	Cooper Wire GRADE 99.99%
MOQ	1 Ton

Packaging and delivery

Packaging Details	Standrad Export sea packagements. Good quality & fumigated wooden box, can better protect the bars. 
Port	Qingdao port

Solid Bare Copper Wire Description

We Sustained A Large Stock Solid Bare Copper Wire And Copper Rod.


Copper Rod Is A Kind Of Non-Ferrous Metal Processing Rod, Which Has Good Processing Performance And High Electrical Conductivity. Mainly Divided Into Brass Rods (Copper-Zinc Alloy, Less Expensive) And Copper Rods (Higher Copper Content).

Application Range: Air-Conditioning Pipes, Refrigerator Pipes, Oil Pipes, Water Supply Pipes And Various Mechanical Supporting Materials, Automobile Synchronizer Gear Rings, Marine Pumps, Valves, Structural Parts, Friction Accessories, Etc.

Copper Rod Specification

Item	Copper Wire
Grade	C10100,C10200,C10300,C10400,C10500,C10700,C10800,C10910,C10920,C10930,C11000,C11300,C11400,C11500,C11600,C12000,C12200,C12300,C12500,C14200,C14420,C14500,C14510,C14520,C14530,C17200,C19200,C21000,C23000,C26000,C27000,C27400,C28000,C33000,C33200,C37000,C44300,C44400,C44500,C60800,C63020,C65500,C68700,C70400,C70620,C71000,C71500,C71520,C71640,C72200,T1,T2,T3,Etc
Standard	JIS ASTM DIN EN ISO
Diameter	0.1-5mm/Custom
Length	Custom
Surface	Mill,Polished,Bright,Mirror,Hair Line,Brush,Checkered,Antique,Sand Blast,Etc
Application	Building, Industry Etc
Payment Terms	30% T/T In Advance As Deposit,70% Balance Against The B/L Copy Or 100% Irrevocable L/C At Sight
Delivery Time	5-15 Days After Receiving L/C Or Deposit
Remark	Specific Requirement Of Alloy Grade,Temper Or Specification Can Be Discussed At Your Request

Copper Rod Production Process

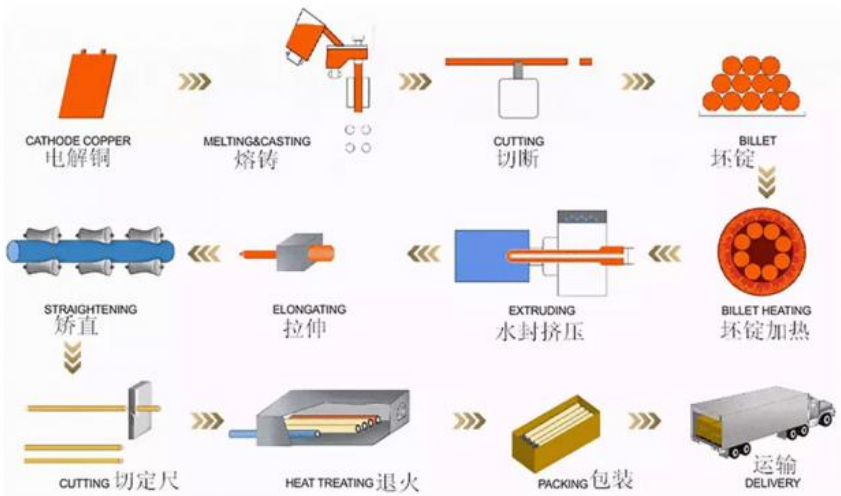

We Use High-Quality Raw Materials, And Strictly Control The Production Process To Ensure That All Products Are In Line With International Standards Of Quality Products. We Can Provide Third-Party Quality Inspection Certificates, And We Pay Attention To The Reliability Of Product Quality And The Authenticity Of Test Results.

Solid Bare Copper Wire Details





Technical Characteristics	CCA wire				
	Clad type				Plated type
	10H	10A	15H	15A	
Size range(mm)	0.15-8.0	0.15-8.0	0.08-8.0	0.08-8.0	0.10-6.0
Copper content (% by weight)	25-31	25-31	32-40	32-40	6-15
Tensile Strength (Mpa)	≥152	110-172	≥152	110-172	90-120
Elongation (%)	1	5	1	5	5
Conductivity (%)	62	62	64	64	62
DC resistivity (Ω.mm ² /m)	0.02743	0.02743	0.02679	0.02676	0.02743
Density (g/cm ³)	3.32	3.32	3.63	3.63	2.85

Inventory & Packaging





If you need any favorable or fast shipping welcome to contact us.



Wuxi Jinnuo copper Co.,Ltd



+86-17763564398



sales01@shuangheyisteel.com



copper-solid.com

32 Chengnan Road, New District, Wuxi City, Jiangsu Province, China